



Loadmonitors - GAMMA series

True power monitoring in 1- or 3-phase mains

Analog output 0...10V

Suitable for VFI (10 to 100Hz)

Zoom voltage 24V to 240V d.c. and 48V to 240V a.c.

Width 22.5mm

Industrial design



Technical data

1. Functions

True power monitoring in 1- and 3-phase mains with analog output 0 ... 10V and the following settings which are selected by means of rotary switch:

Zero	setting of zero point (0%, 25%, 50%, 75% of nominal value)
Zero Fine	fine setting of zero point (0% ... 25% of nominal value)
Span	span (100%, 75%, 50%, 25% of nominal value)
Range	measuring range reversible between 0.75kW, 1.5kW, 3kW, 6kW

2. Indicators

Green LED U ON: indication of supply voltage
Yellow LED's ON/OFF: indication analog output 0...10V

3. Mechanical design

Self-extinguishing plastic housing, IP rating IP40
Mounted on DIN-Rail TS 35 according to EN 60715
Mounting position: any
Shockproof terminal connection according to VBG 4 (PZ1 required),
IP rating IP20
Tightening torque: max. 1Nm
Terminal capacity:
1 x 0.5 to 2.5mm² with/without multicore cable end
1 x 4mm² without multicore cable end
2 x 0.5 to 1.5mm² with/without multicore cable end
2 x 2.5mm² flexible without multicore cable end

4. Input circuit

Supply voltage: 24V to 240V d.c.
48V to 240V a.c.
Terminals: A1-A2 (galvanically separated)
Tolerance:
48V to 240V a.c. -15% to +10%
24V to 240V d.c. -20% to +25%
Rated frequency:
48 to 400Hz
Rated consumption: 2.5VA (1.3W)
Duration of operation: 100%
Reset time: 500ms
Ripple and noise: -
Drop-out voltage: >30% of supply voltage
Overvoltage category: III (in accordance with IEC 60664-1)
Rated surge voltage: 4kV

5. Output circuit


1 analog output 0...10V
Terminals: X1(+) - X2(-)
Settling time: <450ms
Burden: min. 3kΩ
Galvanic isolation: 3kV DC

6. Measuring circuit


Measuring range PN: reversible between
0.75kW, 1.5kW, 3kW, 6kW
Wave form
a.c. Sinus: 10 to 400Hz
Sinus weighted PWM: 10 to 100Hz
Measuring input voltage: terminals L1-L2-L3
1-phase mains 0 to 480V a.c.
3-phase mains 3~ 0 to 480/277V
Overload capacity:
1-phase mains 550V a.c.
3-phase mains 3~ 550/318V
Input resistance: 1.25MΩ
Measuring input current: terminal i-k
Measuring range 0.75kW, 1.5kW: 0 to 6A
Measuring range 3kW, 6kW: 0 to 12A (for I>8A distance >5mm)
Overload capacity: 12A permanent
Input resistance: <10mΩ
Overvoltage category: III (in accordance with IEC 60664-1)
Rated surge voltage: 4kV
7. Accuracy
Base accuracy: ±2% (of maximum scale value)
Frequency influence: ±0.025% / Hz
Voltage influence: -
Temperature influence: ≤0.05% / °C
8. Ambient conditions
Ambient temperature: -25 to +55°C
(in accordance with IEC 60068-1)
Storage temperature: -25 to +70°C
Transport temperature: -25 to +70°C
Relative humidity: 15% to 85%
(in accordance with IEC 60721-3-3
Klasse 3K3)
Pollution degree: 3 (in accordance with IEC 60664-1)
Vibration resistance: 10 to 55Hz 0.35mm
(in accordance with IEC 60068-2-6)
15g 11ms
(in accordance with IEC 60068-2-27)
Shock resistance:

Functions


Zero = 0% / Span = 25% ; Zero = 0% / Span = 100%

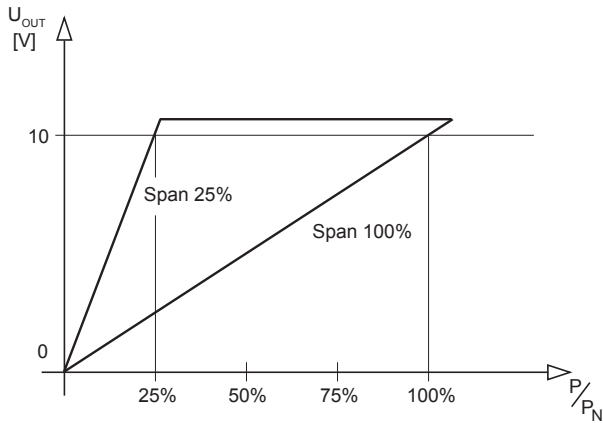



Zero = 25% / Span = 25% ; Zero = 25% / Span = 75%

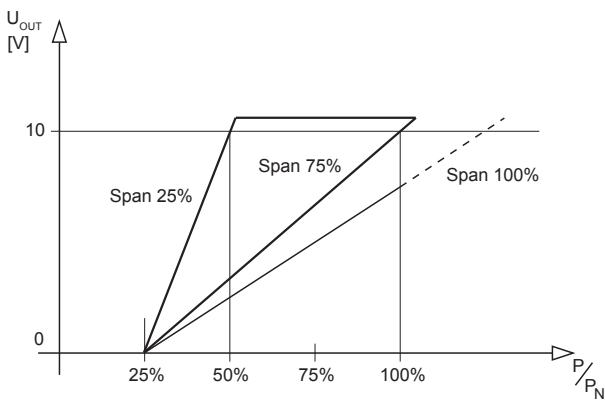

Zero = 37,5% / Span = 50% ; Zero = 37,5% / Span = 100%

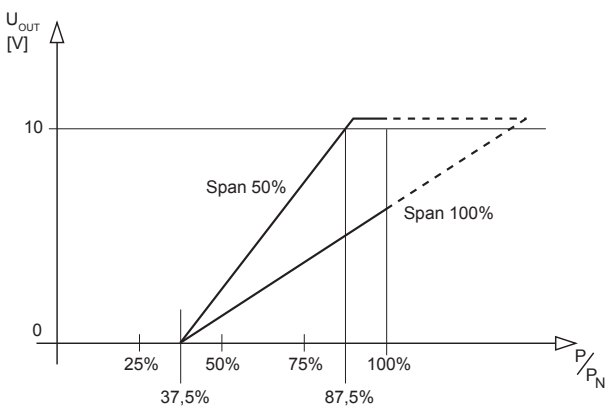

Connections

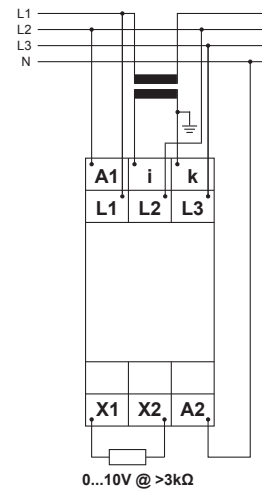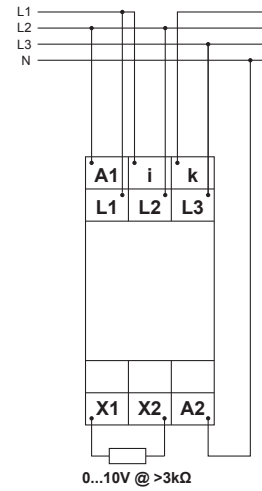

Dimensions

